

CE | TÜVNORD

FUTR

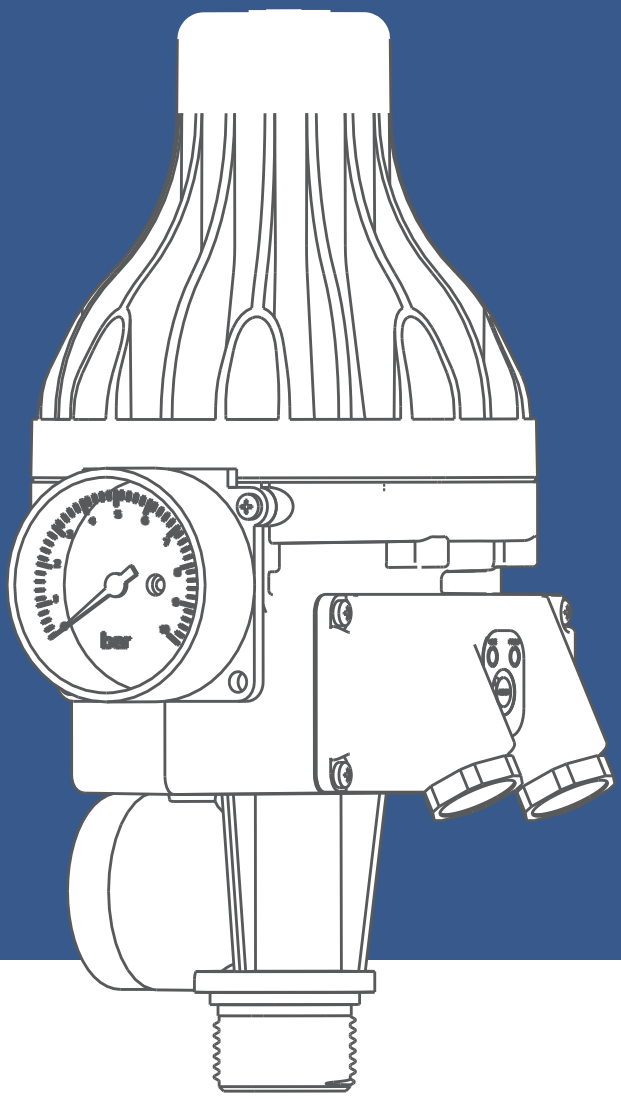

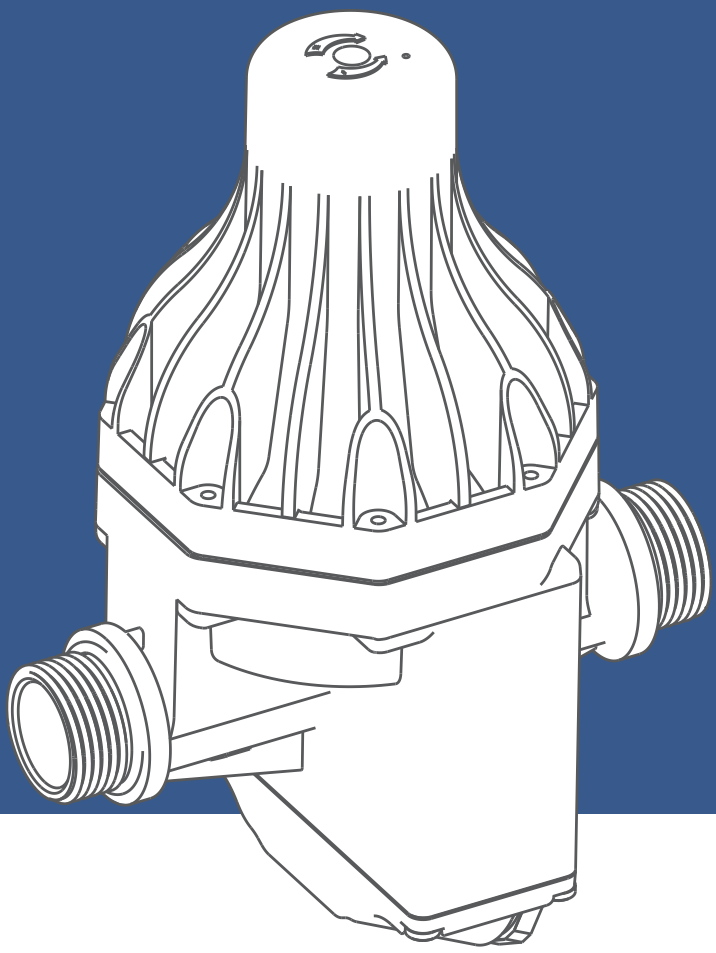

Automatic Pump Controller

MADE IN INDIA

www.futr.co.in

Automatic Pump Controller

ACV

Application

For use with pumps, for automatic start and stop based on water pressure.

Materials

Plastic components in technopolymer.



Features

Built-in Non-Return Valve.

Dry-run protection.

High Temperature Resistant.

Tested 1,00,000 Cycles.

Manual reset for ease of operation.

Max Current -10A

50/60 Hz Operation

IP X5 Protection

Max Pressure - 10Bar

Inlet/Outlet Connection Size -1"


Optional

Adjustable starting pressure range from 1.3 to 2.3 bar.

Differential Pressure > 0.7 bar

Dimensions and Weight

Model	A	B	C	D	E	Kg
ACV	213	155	108	1"	195	1.2

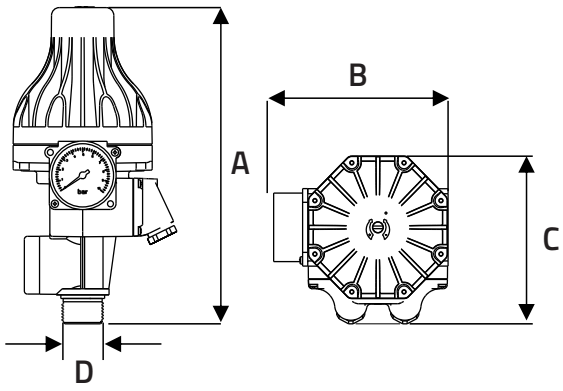

Automatic Pump Controller

ACH

Application

For use with pumps, for automatic start and stop based on water pressure.

Materials

Plastic components in technopolymer.



Features

Built-in Non-Return Valve.

Dry-run protection.

High Temperature Resistant.

Tested 1,00,000 Cycles.

Manual reset for ease of operation.

Max Current -10A

50/60 Hz Operation

IP X5 Protection

Max Pressure - 10Bar

Inlet/Outlet Connection Size -1"


Optional

Adjustable starting pressure range from 1.3 to 2.3 bar.

Differential Pressure > 0.7 bar

Dimensions and Weight

Model	A	B	C	D	E	Kg
ACH	170	230	110	1"	195	1.2

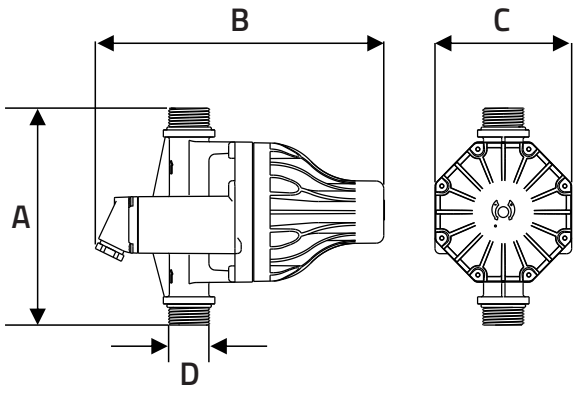

Float Switch

FS



Application

Water level regulator

Materials


Made with non-toxic polypropylene.

Features

Max. Operating Temperature	50 °C
Storage Temperature	-20 to 80 °C
Operating Voltage	230 Vac
Max. Switching Voltage	250 Vac
Frequency	50-60 Hz
Microswitch Capacity	16 A / 21 A
Protection Level	IP 68
Max. Operating Pressure	2 Bar

Dimensions

Model	A	B	C
FS	93	128	42

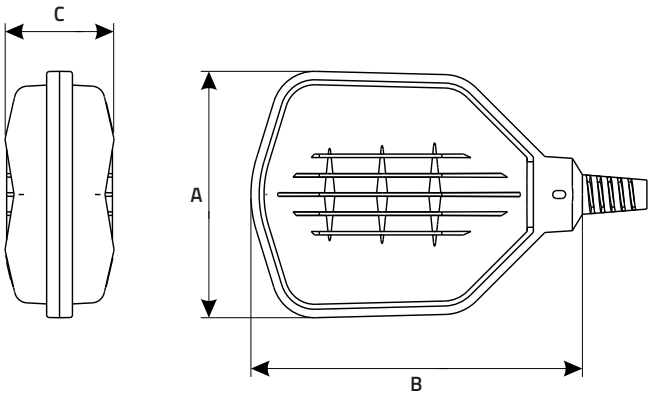

ILLUMINATO LIGHTING TECHNOLOGIES
111, athipalayam road, ganapathy, coimbatore - 641 006
+91 8870 440 880 | sales@futr.co.in